

## Frequency Response Measurements of ZN50R-BeCu Probes

### Introduction

Microwave measurements on a TTP4 probe station with semirigid coaxial arms with SMA connectors (K-085-K) were performed from 30 kHz to 6 GHz. The probe tips were BeCu (ZN50R-25-BeCu). All measurements reported here were at room temperature.

### Measurement Procedure and Instrumentation

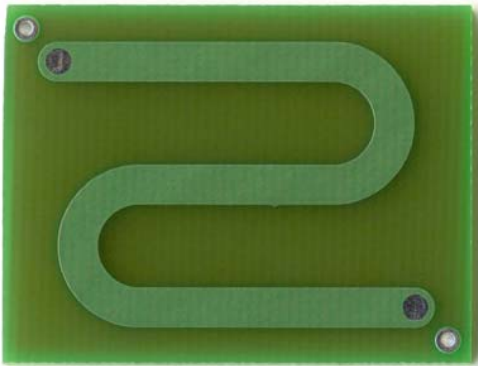


Figure 1 50  $\Omega$  strip line circuit

The transmission ( $S_{12}$ ) and reflection ( $S_{11}$ ) coefficients of a TTP4 probe station with semirigid arms were measured. The measurements were performed using a Hewlett-Packard HP8753ES S-parameter Network Analyzer. The frequency range of the measurements was 30 kHz to 6 GHz.

This network analyzer has APC 7 mm connectors. A custom cable was manufactured for the measurements. The cable was 3 ft of Trompeter SEMFLEX 50  $\Omega$  coax with an APC 7 mm connector on one end and SMA connectors on the other end. Passive 50  $\Omega$  strip line was used for the measurements. Figure 1 is a picture of the circuit. To measure the frequency response of the test circuit, two measurements were performed. The first was with a 25 cm length of semirigid cable soldered to the strip line. These soldered connections also had a signal ground directly at the sample. In the data plots, these are referred to as 'soldered connection'.

### PC Board Strip Line Semirigid Cable BeCu Probes

The measurements of the sample consisted of an 8 cm length of 50  $\Omega$  strip line on a sample of printed circuit board. The line was printed in an s-pattern to fit the available space, and simply served as a sample to test the measurement characteristics of the ZN50 probes and the probe station arms. The plots of  $S_{21}$  and  $S_{22}$  are shown in figures 2 and 3. The large spike in  $S_{21}$  at 400 MHz is related to the break in the ground from the probe to the sample.

### $S_{21}$ — ZN50 Connector on 50 $\Omega$ Strip Line

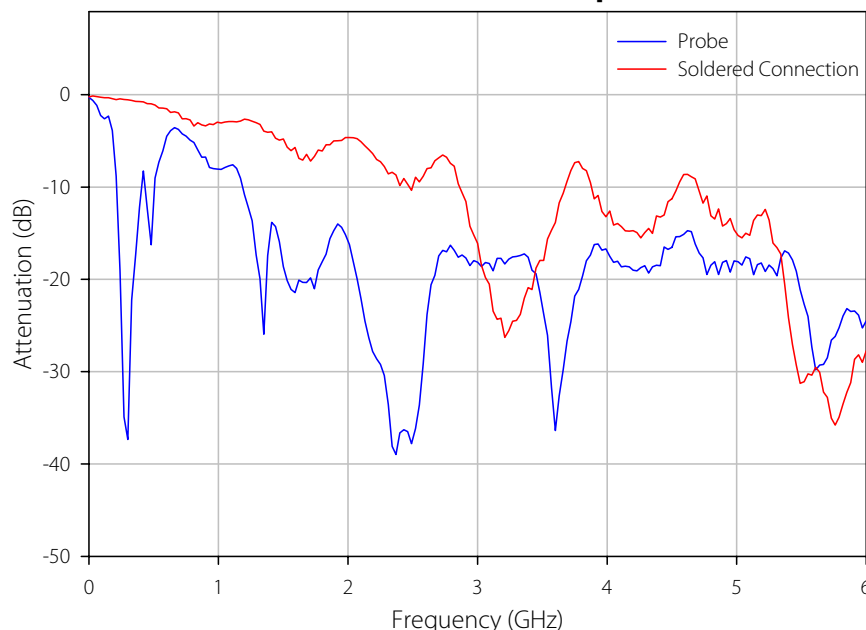


Figure 2  $S_{21}$  (forward scattering parameter) vs. Frequency, PC board strip line

### S11 — ZN50 Connector on 50 Ω Strip Line

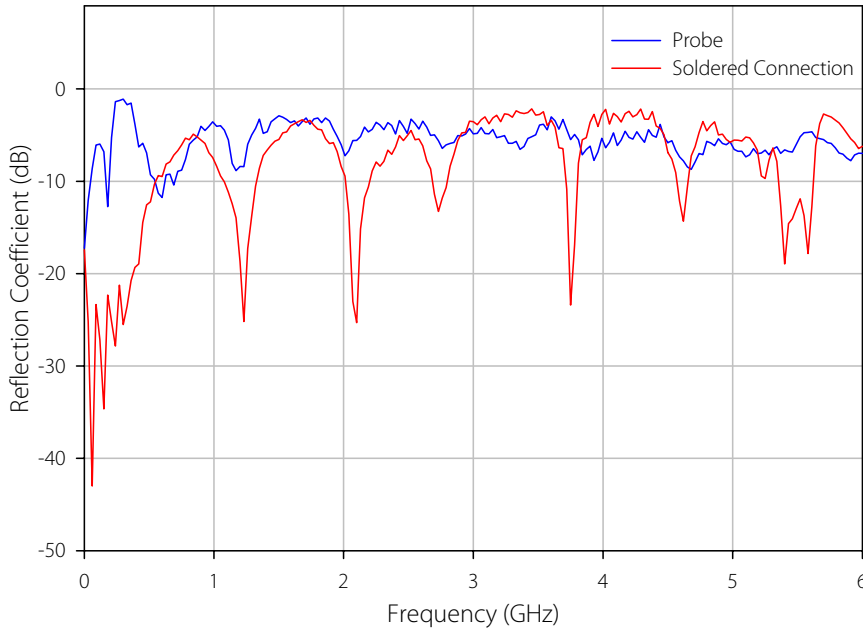


Figure 3 S11 vs. Frequency, PC board strip line

Figure 4 shows similar measurements in a TTP6 probe station. We see that the attenuation peak has moved up to about 800 MHz.

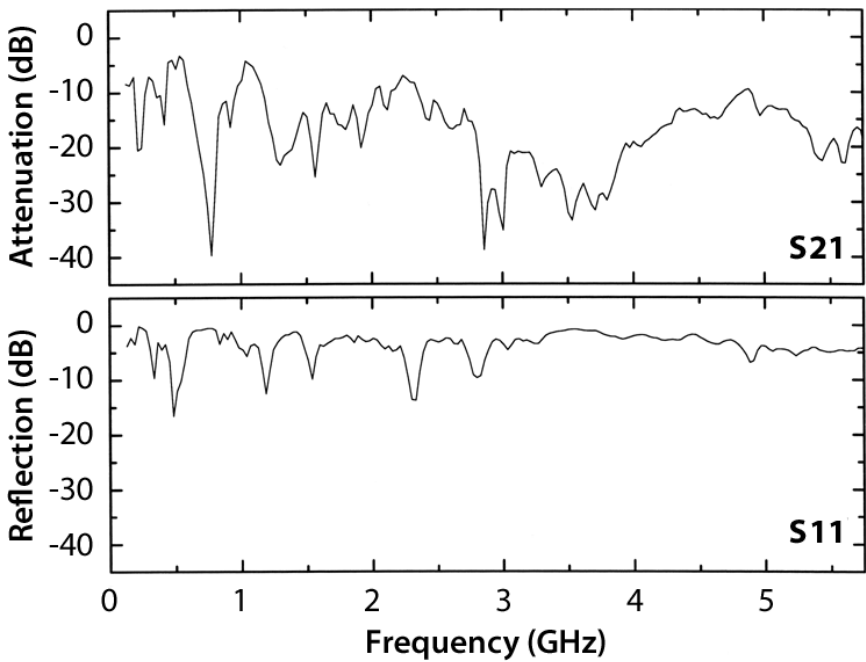


Figure 4 TTP6 Attenuation and Reflection